

# TSW200 TELTONIKA Industrial Unmanaged PoE+ Switch



**Kode** : TSW200

**Brand** : Teltonika


**Jenis** : Switch Unmanaged POE

**Harga** : Rp 1.673.000,00

TSW200 is an unmanaged industrial switch with 2 SFP ports for long-range Fiber-optic communication and 8 Gigabit Ethernet ports that support IEEE802.af and IEEE802.3at Power-over-Ethernet standards. Classified as power source equipment (PSE), it enables the centralization of the power supply, providing up to 30 watts per port and reducing the effort to install power.

**\*Belum termasuk power adaptor**

Penawaran Harga Spesial

 08112039555


Compatible Power Adaptor :

- [Power Adaptor DC 2-PIN 48 Volt 60 Watt 1.25 A](#)

- [Power Adaptor DC 2-PIN 48 Volt 120 Watt 2.5A](#)

Features :

- 2 x SFP ports for long-range Fiber-optic communication
- 8 x PoE+ ports with 802.af, 802.3at standard support
- Total power budget at PSE up to 240 W
- 8 x Gigabit Ethernet with speeds up to 1000 Mbps

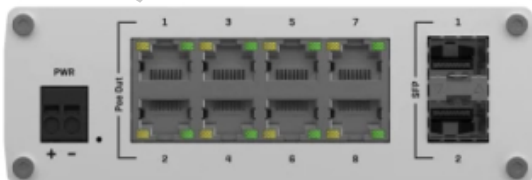

## Specification

|  |   |
|--|---|
| <b>Model</b>                           | TSW200  |
| <b>ETHERNET</b>                        |   |
| <b>LAN</b>                             | 8 x ETH ports, 10/100/1000 Mbps, supports auto MDI/MDIX crossover |
| <b>Fiber</b>                           | 2 x SFP ports   |
| <b>IEEE 802.3 series standards</b>     | 802.3i, 802.3u, 802.3ab, 802.3x, 802.3az, 802.3ad                 |
| <b>POE</b>                             |   |
| <b>PoE ports</b>                       | Port 1-8  |
| <b>PoE standards</b>                   | 802.3af and 802.3at   |
| <b>PoE Max Power per Port (at PSE)</b> | 30 W  |
| <b>PoE Power Budget (at PSE)</b>       | 240 W   |
| <b>PERFORMANCE SPECIFICATIONS</b>      |   |
| <b>Bandwidth (Non-blocking)</b>        | 20 Gbps   |
| <b>Packer buffer</b>                   | 128 KB  |
| <b>MAC address table size</b>          | 2K entries  |
| <b>Jumbo frame support</b>             | 9216 bytes  |
| <b>POWER</b>                           |   |
| <b>Connector</b>                       | 2-pin industrial DC power socket                                  |
| <b>Input voltage range</b>             | 7 - 57 VDC  |
| <b>Input voltage range for PoE</b>     | 44 - 57 VDC   |
| <b>Power consumption</b>               | Idle: 1.81 W / Max: 5.5 W / PoE Max: 245.5 W                      |
| <b>PHYSICAL INTERFACES</b>             |   |
| <b>Ethernet</b>                        | 8 x RJ45 ports, 10/100/1000 Mbps                                  |
| <b>Fiber</b>                           | 2 x SFP ports   |
| <b>Status LEDs</b>                     | 1 x Power LED, 16 x LAN status LEDs 2 x SFP status LEDs           |
| <b>Power</b>                           | 1 x 2-pin industrial DC power socket                              |
| <b>Other</b>                           | 1 x Grounding screw   |

| PHYSICAL SPECIFICATION    |   |
|---------------------------|---|
| Casing material           | Full aluminum housing   |
| Dimensions (W x H x D)    | 132 x 44.2 x 95.1 mm  |
| Mounting options          | DIN rail or wall mounting (additional kit needed), flat surface placement |
| OPERATING ENVIRONMENT     |   |
| Operating temperature     | -40 °C to 75 °C   |
| Operating humidity        | 10% to 90% non-condensing   |
| Ingress Protection Rating | IP30  |

Standard Package Contains :

- TSW200
- QSG (Quick Start Guide)
- Packaging box

[Download Datasheet](#)

\* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat

URL : <https://www.citraweb.com/produk/1063/>

Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email [sales@citraweb.com](mailto:sales@citraweb.com)