

eKitEngine AP160 HUAWEI Wi-Fi 6 1.775Gbps Dual Band Wall Plate Access Point

**Kode** : AP160**Brand** : Huawei**Jenis** : Wireless Indoor**Harga** : Rp 1.278.000,00

HUAWEI eKitEngine AP160 adalah Access Point indoor wall plate 86x86 mm dengan panel ultra-tipis 8 mm berteknologi Wi-Fi 6 (802.11ax) yang beroperasi simultan di frekuensi 2.4 GHz (2x2) dan 5 GHz (2x2) dengan kecepatan data hingga 1,775 Gbps. Ukuran ringkas dan sangat ideal dipasang untuk area perkantoran, properti komersial, dan hotel.

***Belum termasuk adaptor dan poe injector**

***Spesifikasi perangkat dijual bisa berbeda dengan yang ditampilkan karena menyesuaikan dengan regulasi di Indonesia.**

Produk ini merupakan produk Fix Price. Pembelian produk tidak dapat menggunakan diskon apapun.

Penawaran Harga Spesial

 **08112039555**

- Wall plate 86x86 AP
- 802.11ax
- 1.775 Gbps device rate
- Dual-radio
- 48 access users recommended
- Max. 128 access users
- 20 dBm transmit power
- Smart antenna
- 15 m optimal coverage range

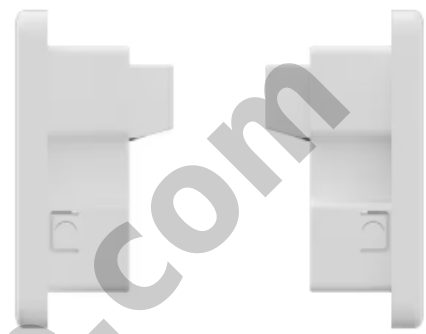
TOP VIEW



BACK VIEW



SIDE VIEW


Spesifikasi

Model	AP160
Wi-Fi standard	2.4G: 802.11b/g/n/ax 5G: 802.11a/n/ac/ac Wave 2/ax
Optimal Signal Distance (m)	15
Max Number of Access Users	128
Recommended Number of Access Users	48
Device Rate	1.775 Gbps
Maximum number of physical ports on the entire device	2x GE (RJ45), 10M/100M/1000M auto-sensing
Radio number	2
Maximum channel bandwidth [MHz]	Radio 0 (2.4 GHz): 40 MHz Radio 1 (5 GHz): 80 MHz
Maximum transmit power	2.4G: 17 dBm/chain 20 dBm (combined power) 5G: 17 dBm/chain 20 dBm (combined power)
MIMO spatial streams	Radio 0 (2.4 GHz): 2x2 Radio 1 (5 GHz): 2x2
Maximum power consumption [W]	9.1
Input voltage range [V]	PoE: 802.3af
Dimensions without packaging (H x W x D) [mm(in.)]	86 mm x 86 mm x 42.5 mm (3.39 in. x 3.39 in. x 1.67 in.)
Long-term operating temperature [°C(°F)]	0°C to 40°C (32°F to 104°F) (From 1800 m to 5000 m [5905.51 ft. to 16404.20 ft.], the maximum ambient temperature decreases by 1°C [1.8°F] for every 300 m [984.25 ft.] increase in altitude.)

Long-term operating relative humidity [RH]	5% RH to 95% RH, non-condensing
Radio interface	Built-in smart antennas
Antenna gain	2.4 GHz: 3 dBi/chain (peak value) 3 dBi (combined gain) 5 GHz: 2 dBi/chain (peak value) 1 dBi (combined gain)
Operating frequency band	2.4GHz,5GHz
Power supply mode	PoE
Service port surge protection	PoE port: Common mode (8 wires to ground): 4 kV (1.2/50 us, 42 ohms), criterion C
Storage temperature [°C(°F)]	-40°C to +70°C (-40°F to +158°F)
Long-term operating altitude [m(ft.)]	-60 m to +5000 m (-196.85 ft to +16404.20 ft)
Atmospheric pressure [kPa]	53kPa - 106kPa ETSI 300 019-2-3
Ground	Floating ground
Frequency stability [ppm]	+/-20

[Download Datasheet](#)

* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat

URL : <https://www.citraweb.com/produk/1545/>

Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email sales@citraweb.com