

eKitEngine AP271E HUAWEI BE3600 Dual-Band Wi-Fi 7 Multi-Port Wall Plate Access Point

**Kode** : AP271E**Brand** : Huawei**Jenis** : Wireless Indoor**Harga** : Rp 2.298.000,00

HUAWEI eKitEngine AP271E BE3600 Dual-Band Wi-Fi 7 Multi-Port Wall Plate Access Point adalah Access Point indoor slim wall plate berteknologi Wi-Fi 7 (802.11be) yang mendukung teknologi MLO, MU-MIMO pada frekuensi 2.4 GHz (2x2) dan 5 GHz (2x2) dengan kecepatan total hingga 3.570 Mbps. Dilengkapi 1 port 2.5GE *uplink*, 4 port GE *downlink*, serta port *pass-through*, perangkat ringkas ini sangat fleksibel dipasang pada dinding maupun *junction box* dan mudah dikelola.

***Belum termasuk adaptor dan poe injector**


***Spesifikasi perangkat dijual bisa berbeda dengan yang ditampilkan karena menyesuaikan dengan regulasi di Indonesia.**

Produk ini merupakan produk Fix Price. Pembelian produk tidak dapat menggunakan diskon apapun.

Penawaran Harga Spesial

 08112039555

- Wall plate AP
- Wi-Fi 7
- 3.57 Gbps device rate
- Dual-radio
- 80 access users recommended
- Max. 256 access users
- 23 dBm transmit power
- 4 x GE electrical ports
- Smart antenna
- 20 m optimal coverage range

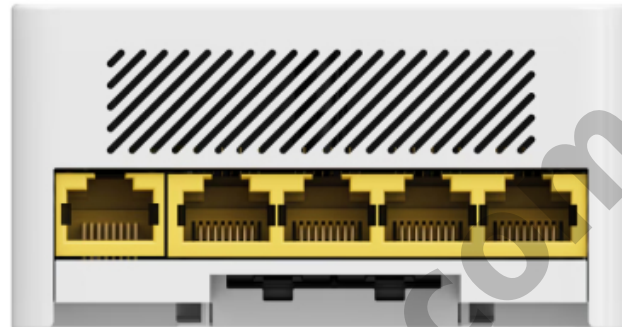

Spesifikasi

Model	AP271E
CPU	2-core, 1.3 GHz
Memory	DDR4 512 MB
Power supply mode	PoE DC power adapter
Storage	NAND Flash 256 MB
Rated input voltage [V]	DC: 12 V PoE: 802.3at/af
Input voltage range [V]	DC: 12 V $\pm$ 10% PoE: 802.3at/af
Service port surge protection	PoE port: Differential mode (48 V-RTN): 0.5 kV (1.2/50 us, 42 ohms), criterion B Common mode (8 wires to ground): 4 kV (1.2/50 us, 42 ohms), criterion B
Maximum number of physical ports on the entire device	4x GE (RJ45) 10M/100M/1000M auto-sensing 1x 2.5GE (RJ45) 100M/1000M/2500M auto-sensing 2x PASS-THRU (RJ45)
Long-term operating temperature [°C(°F)]	0°C to 40°C (32°F to 104°F) (From 1800 m to 5000 m [5905.51 ft. to 16404.20 ft.], the maximum temperature of the device decreases by 1°C [1.8°F] for every 300 m [984.25 ft.] increase in altitude.)
Storage temperature [°C(°F)]	-40°C to +70°C (-40°F to +158°F)
Long-term operating relative humidity [RH]	5% RH to 95% RH, non-condensing
Long-term operating altitude [m(ft.)]	-60 m to +5000 m (-196.85 ft to +16404.20 ft)
Atmospheric pressure [kPa]	53kPa - 106kPa ETSI 300 019-2-3

Ground	Floating ground
USB	USB 2.0, power supply: 2.5 W/5 W
Radio number	2
MIMO spatial streams	Radio 0 (2.4 GHz): 2x2 Radio 1 (5 GHz): 2x2
Wi-Fi standard	2.4 GHz: 802.11b/g/n/ax/be 5 GHz: 802.11a/n/ac/ac Wave 2/ax/be
Radio interface	Built-in smart antennas
Antenna gain	2.4 GHz: 5 dBi/chain (peak gain) 3 dBi (combined gain) 5 GHz: 5 dBi/chain (peak gain) 3 dBi (combined gain)
Maximum transmit power	2.4 GHz: 20 dBm/chain 23 dBm (combined power) 5 GHz: 20 dBm/chain 23 dBm (combined power)
Maximum power consumption [W]	13.2 (excluding USB)
Maximum heat dissipation [BTU/hour]	42.8
802.3bt power supply description	The power supply mode is negotiated to 802.3at, and no function is restricted.
802.3at power supply description	The power supply mode is negotiated to 802.3at, and no function is restricted.
802.3af power supply description	The power supply mode is negotiated to 802.3af. USB is not supported, and other functions are not restricted.
DC power supply description	No function is limited.
Operating frequency band	2.4GHz, 5GHz
Maximum channel bandwidth [MHz]	Radio 0 (2.4 GHz): 40 MHz Radio 1 (5 GHz): 160 MHz

[Download Datasheet](#)

* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat

URL : <https://www.citraweb.com/produk/1546/>

Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email sales@citraweb.com