

SWM282 TELTONIKA Managed PoE+ Switch



Kode : SWM282

Brand : Teltonika

Jenis : Switch Managed POE

Harga : Rp 7.014.000,00

Teltonika SWM282 is a high-capacity L2 managed switch with enhanced L3 capabilities, built to simplify network control while delivering power and connectivity at scale. It features 24 PoE+ ports, supplying up to 30 W per port with a total power budget of 300 W, and 4 SFP ports. This 24-port switch is an ideal choice for enterprise networks and IIoT solutions.


***Belum termasuk power plug**

Penawaran Harga Spesial

08112039555

Features :

- Support PoE+ deliver power and data through 24 PoE+ ports with up to 30W per port
- L2+ Advanced routing protocols, VLAN segmentation, and TPM 2.0 security
- Shipped with 2 years of RMS Management
- Profinet, MRP, and EtherNet/IP for mixed industrial environments

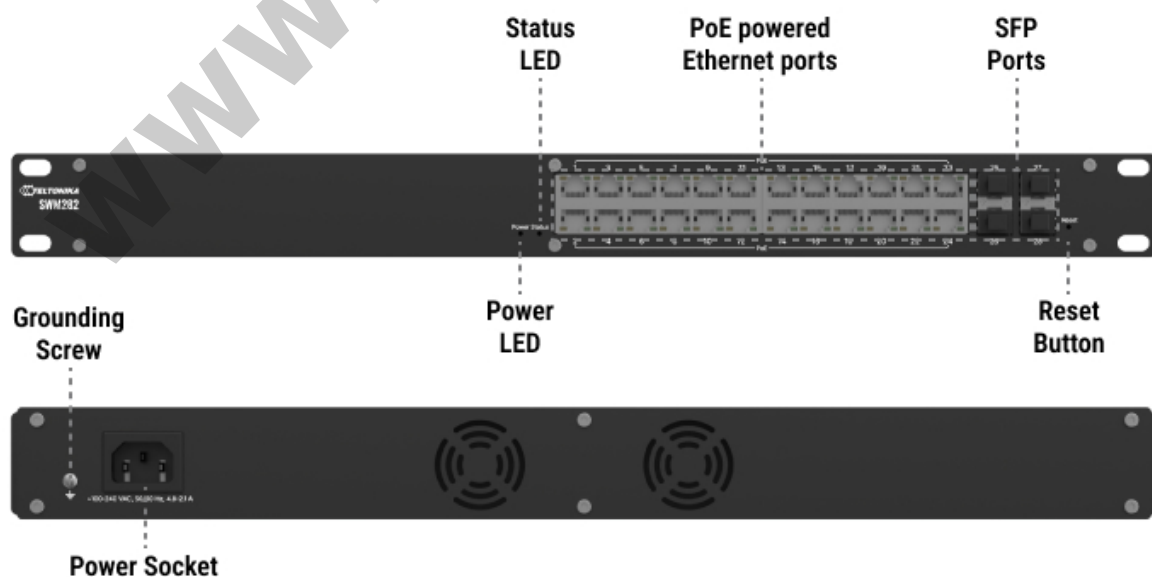

Specification

Model	SWM282
HARDWARE	
RAM	128 MB, DDR3
Flash storage	16 MB serial flash
Powering options	C14 connector
Input voltage range	100-240 VAC, 50/60 Hz
Input voltage range for PoE	44 – 57 VDC
Power consumption	Idle: 9 W / Max: 330 W / PoE Max: 300
PoE standards	IEEE 802.3af
EEE 802.3 series standards	802.3i, 802.3u, 802.3ab, 802.3x, 802.3az
Status LEDs	1 x Power LED, 48 x ETH status LEDs, 1 x Status LED, 4 x SFP status LEDs
Ethernet	24 x RJ45 ports, 10/100/1000 Mbps
SFP	4 x SFP ports
Ingress protection rating	IP30
Operating temperature	0 °C to 50 °C
Dimensions (W x H x D)	483 x 44 x 234 mm
Mounting options	Rack mounting kit
INDUSTRIAL PROTOCOLS	
Profinet	Profinet Class B conformance
PERFORMANCE SPECIFICATIONS	
Bandwidth (Non-blocking)	56 Gbps
Packet buffer	512 KB
MAC address table size	8K entries
Jumbo frame support	10000 bytes
SERVICES	
Supported services	EtherNet/IP, SNMP V2, V3, LLDP, Network Management

NETWORK	
MRP	MRP client role, MRP manager role
L2 features	Loop protection, Forwarding table, VLAN, STP/RSTP
DHCP	DHCP server, DHCP client, DHCP static leases capable of using MAC with wildcards
Port Settings	Enable/disable, link speed control, port isolation, EEE (802.3az) management, Port Mirroring
L3 Features	Static IPv4 routing, static IPv6 routing, DHCPv6 client, static IPv6 address
QOS	
QOS	Port priority, DSCP priority, 802.1p priority, TOS
Scheduling method	SP/WFQ/WRR
Bandwidth control	Rate limiting, storm control
DIAGNOSTICS	
Tools	Cable diagnostic, ping, traceroute, nslookup
Ping reboot	Capability to restart PoE in a specific port

Standard Package Contains :

- SWM282
- QSG (Quick Start Guide)
- Packaging box

[Download Datasheet](#)

* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat

URL : <https://www.citraweb.com/produk/1555/>

Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email sales@citraweb.com