

# RG-ES211GS-P REYEE 11-Port Gigabit Smart Cloud Managed PoE Switch, 1 x SFP Uplink

**Kode** : RG-ES211GS-P

**Brand** : Ruijie - Reyee

**Jenis** : Switch Managed POE

**Harga** : Rp 1.393.000,00



**RG-ES211GS-P** REYEE 11-Port Gigabit Smart Cloud Managed PoE Switch, 1 x SFP Uplink merupakan switch Layer 2 dilengkapi dengan 8 port PoE+ 10/100/1000BASE-T (**Max PoE Budget 120W**), 2 port 10/100/1000BASE-T dan 1 port SFP 1G.


**Produk ini merupakan produk Fix Price. Pembelian produk tidak dapat menggunakan diskon apapun.**

Penawaran Harga Spesial

 **08112039555**

- 1 x 1GE SFP Port for Flexible Uplink.
- Cost-Effective Switch.
- IPC Recognition for Enhanced CCTV Network Value.
- Smart Protection for Service Continuity.
- Perpetual PoE.
- Lifetime Management on Ruijie Cloud Anytime, Anywhere.

## FRONT VIEW

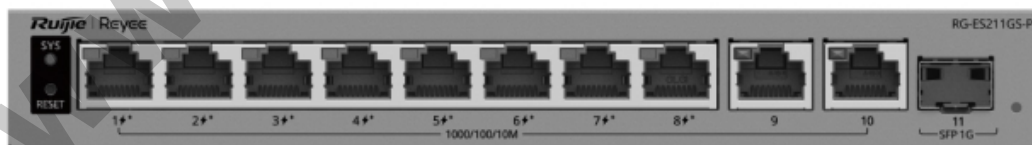

## BACK VIEW





## Specification

|                                   |                  |
|-----------------------------------|------------------|
| Model                             | RG-ES211GS-P     |
| Number of 10/100/1000BASE-T ports | 10               |
| Number of 1GE SFP ports           | 1                |
| Number of PoE/PoE+ Out ports      | 8                |
| PoE power pins                    | 1-2 (+), 3-6 (-) |

|                         |                                                                                                                                                                                                                                                     |
|-------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PoE budget              | 120 W                                                                                                                                                                                                                                               |
| Layer Type              | Layer 2                                                                                                                                                                                                                                             |
| Switching capacity      | 22 Gbps                                                                                                                                                                                                                                             |
| Forwarding rate         | 16.37 Mpps                                                                                                                                                                                                                                          |
| Max MAC address entries | 16000                                                                                                                                                                                                                                               |
| VLAN                    | 32                                                                                                                                                                                                                                                  |
| Fan                     | Fanless                                                                                                                                                                                                                                             |
| Dimensions (W x D x H)  | 205 mm x 105 mm x 28 mm                                                                                                                                                                                                                             |
| MTBF                    | 200.000 hours                                                                                                                                                                                                                                       |
| Port surge              | 6 kV                                                                                                                                                                                                                                                |
| Power Consumption       | 8.5 W (with no PoE load)<br>128.5 W (with full PoE load)                                                                                                                                                                                            |
| Power input             | DC adapter:<br>Rated input voltage: 100 V AC to 240 V AC, 50 Hz to 60 Hz<br>Maximum input voltage: 90 V AC to 264 V AC, 47 Hz to 63 Hz<br>Rated input current: 2 A<br><br>Output:<br>Rated output voltage: 54 V DC<br>Maximum output current: 2.5 A |
| Power supply            | DC power adapter                                                                                                                                                                                                                                    |
| Operating Temperature   | 0°C to 40°C                                                                                                                                                                                                                                         |
| Operating humidity      | 10% to 90% RH (non-condensing)                                                                                                                                                                                                                      |

[Download Datasheet](#)

\* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat

URL : <https://www.citraweb.com/produk/1570/>

Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email [sales@citraweb.com](mailto:sales@citraweb.com)