

# TP-LINK EAP720 OMADA BE5000 Ceiling Mount Wi-Fi 7 Access Point

**Kode** : EAP720**Brand** : TP-Link Omada**Jenis** : Wireless Indoor**Harga** : Rp 1.994.000,00

**TP-LINK EAP720 OMADA** merupakan perangkat access point **Dual-Band 4-Stream Wi-Fi 7** up to 5.0 Gbps (4324 Mbps di 5GHz + 688 Mbps di 2.4GHz) dilengkapi dengan 1 port 2.5G PoE+ 802.3at cocok digunakan pada ceiling/wall.


**Produk ini merupakan produk Fix Price. Pembelian produk tidak dapat menggunakan diskon apapun.**

**\*Produk ini belum termasuk PoE Adapter.**

**\*Spesifikasi perangkat dijual bisa berbeda dengan yang ditampilkan karena menyesuaikan dengan regulasi di Indonesia.**

**Penawaran Harga Spesial** **08112039555**

- **Dual-Band 4-Stream Wi-Fi 7:** up to 5.0 Gbps (4324 Mbps di 5GHz + 688 Mbps di 2.4GHz).
- **1x Port 2.5G:** Maksimalkan potensi penuh dari Wi-Fi 7.
- **Low Latency dan Interferensi :** Multi-Link Operation, Multi-Rus, dan 4K -QAM.
- **Fitur Lanjutan:** Mendukung manajemen terpusat, Mesh, dan Roaming Mulus (*Seamless Roaming*).

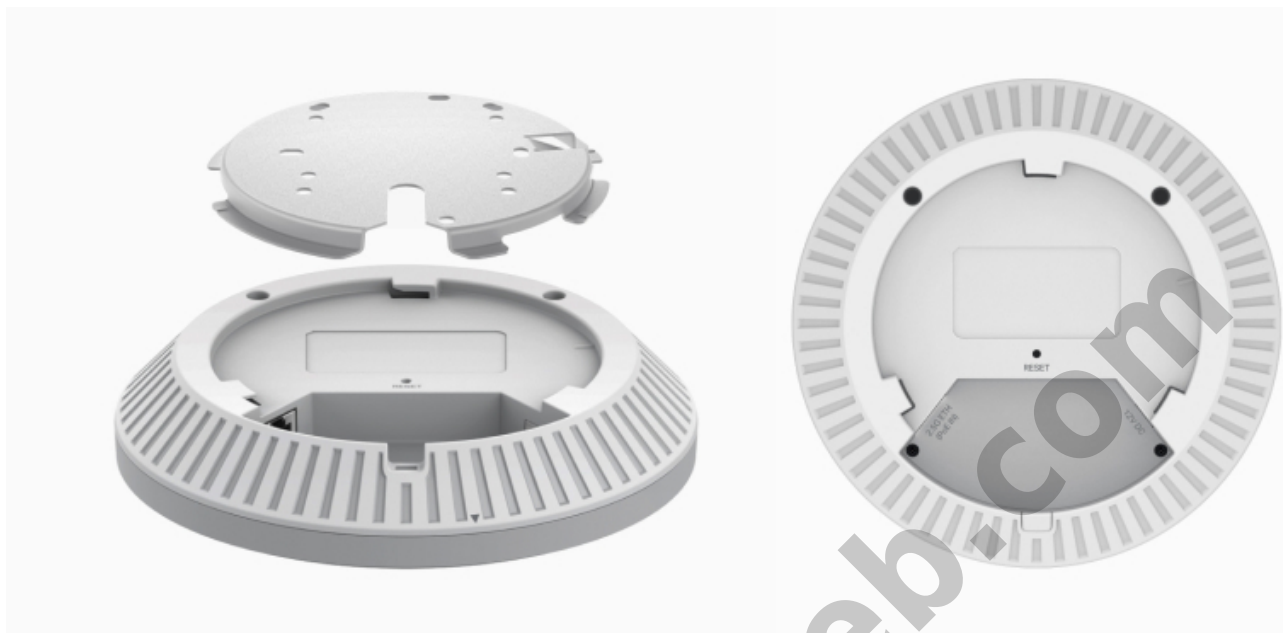

## Spesifikasi

|                                 |                                                                                                      |
|---------------------------------|------------------------------------------------------------------------------------------------------|
| <b>Model</b>                    | EAP720                                                                                               |
| <b>HARDWARE FEATURES</b>        |                                                                                                      |
| <b>Interface</b>                | 1x 2.5G Ethernet Port                                                                                |
| <b>Button</b>                   | Reset                                                                                                |
| <b>Power Supply</b>             | 802.3at PoE or 12V/1.5A DC (Power Adapter Included)                                                  |
| <b>Max. Power Consumption</b>   | <ul style="list-style-type: none"> <li>• 17.83 W (For PoE)</li> <li>• 13.99 W (For DC)</li> </ul>    |
| <b>Dimensions ( W x D x H )</b> | 6.3 x 6.3 x 1.4 in (160 x 160 x 36.7 mm)                                                             |
| <b>Antenna</b>                  | <ul style="list-style-type: none"> <li>• 2.4 GHz: 2x 4.0 dBi</li> <li>• 5 GHz: 2x 5.0 dBi</li> </ul> |
| <b>Bluetooth</b>                | 1 x 4.0 dBi, Bluetooth 5.2<br>*Firmware update may be required.                                      |
| <b>Mounting</b>                 | Ceiling / Wall /Junction Box Mounting (Kits Included)                                                |
| <b>WIRELESS FEATURES</b>        |                                                                                                      |
| <b>Coverage</b>                 | 1500 ft <sup>2</sup> (140m <sup>2</sup> )                                                            |
| <b>Concurrent Clients</b>       | 250+                                                                                                 |
| <b>Wireless Standards</b>       | IEEE 802.11 a/b/g/n/ac/ax/be                                                                         |
| <b>Frequency</b>                | 5 GHz, and 2.4 GHz                                                                                   |
| <b>Signal Rate</b>              | 688 Mbps (2.4 GHz) + 4324 Mbps (5 GHz)                                                               |

|                           |                                                                                                                                                                                                                                                                       |
|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Transmission Power</b> | < 25dBm (2.4GHz)<br>< 25 dBm (5 GHz, UNII-1&UNII-4)<br>< 24 dBm (5 GHz, UNII-2&UNII-3)                                                                                                                                                                                |
| <b>Certification</b>      | CE, FCC, RoHS, IC                                                                                                                                                                                                                                                     |
| <b>Package Content</b>    | <ul style="list-style-type: none"><li>• Omada Ceiling Mount Access Point EAP720</li><li>• Installation Guide</li><li>• Ceiling/Wall/Junction Box Mounting Kits</li></ul>                                                                                              |
| <b>Environment</b>        | <ul style="list-style-type: none"><li>• Operating Temperature: 0 °C-40 °C (32 °F-104 °F)</li><li>• Storage Temperature: -40 °C-70 °C (-40 °F-158 °F)</li><li>• Operating Humidity: 10%-90% non-condensing</li><li>• Storage Humidity: 5%-90% non-condensing</li></ul> |

[Download Datasheet](#)

\* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat

**URL :** <https://www.citraweb.com/produk/1582/>

**Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email [sales@citraweb.com](mailto:sales@citraweb.com)**