

# TP-LINK ES208G OMADA 8-Port Gigabit Easy Managed Switch

**Kode** : ES208G

**Brand** : TP-Link Omada

**Jenis** : Switch Managed

**Harga** : Rp 427.000,00





**TP-LINK ES208G OMADA** merupakan switch layer 2 dengan casing Desktop/Rackmount dilengkapi 8 port 10/10/1000 Mbps RJ45, casing metal dan fanless desain.

**Produk ini merupakan produk Fix Price. Pembelian produk tidak dapat menggunakan diskon apapun.**

Penawaran Harga Spesial

 **08112039555**

- 8 port RJ45 10/100/1000Mbps
- Mudah Digunakan: Mendukung plug-and-play untuk konektivitas instan dan konfigurasi sederhana untuk fitur tambahan
- Manajemen Cloud Terpusat melalui web atau aplikasi Omada
- Pencegahan Loop Otomatis, VLAN dan Pengawasan IGMP
- Desain tanpa kipas untuk pengoperasian yang senyap
- Casing logam yang tahan lama dan desain pemasangan di meja/rak

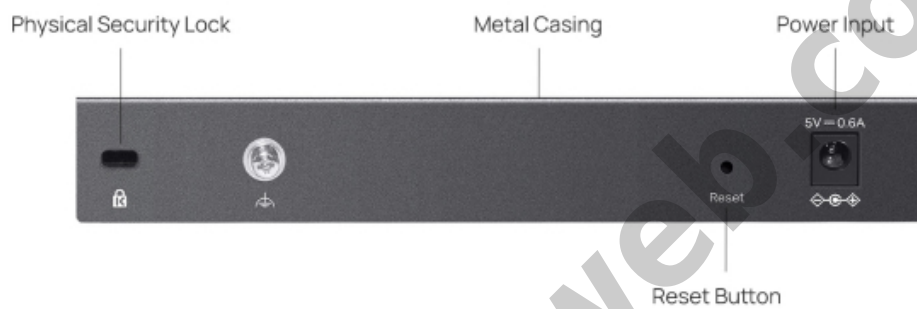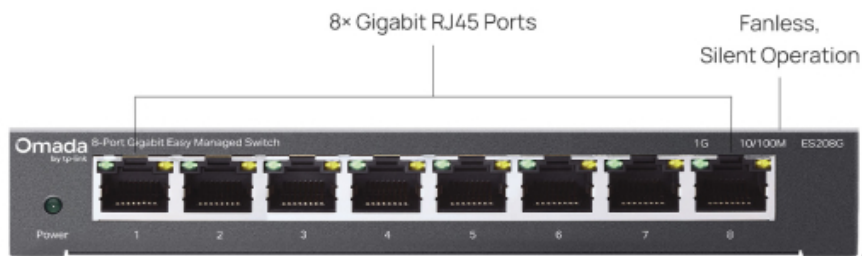



## Spesifikasi

|                          |                                                                                                                              |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------|
| Model                    | ES208G                                                                                                                       |
| <b>HARDWARE FEATURES</b> |                                                                                                                              |
| Interface                | <ul style="list-style-type: none"> <li>• 8× 10/100/1000 Mbps RJ45 Ports</li> <li>• Auto-Negotiation/Auto MDI/MDIX</li> </ul> |
| Fan                      | Fanless                                                                                                                      |
| Physical Security Lock   | Yes                                                                                                                          |
| Power Supply             | AC/DC Adapter (Input: 100-240V AC; Output: 5V DC/0.6A)                                                                       |
| Dimensions ( W x D x H ) | 6.2 × 4.0 × 1.0 in (158 × 101 × 25 mm)                                                                                       |
| Surge Protection         | ±6 kV                                                                                                                        |
| Mounting                 | <ul style="list-style-type: none"> <li>• Desktop</li> <li>• Wall Mounting</li> </ul>                                         |
| Max. Power Consumption   | 2.679 W (220V/50Hz)                                                                                                          |
| Max. Heat Dissipation    | 9.11 BTU/hr (220V/50Hz)                                                                                                      |
| Packet Buffer Memory     | 4 Mbit                                                                                                                       |
| Switching Capacity       | 16 Gbps                                                                                                                      |

|                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Packet Forwarding Rate</b> | 11.9 Mpps                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>MAC Address Table</b>      | 8K                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Jumbo Frame</b>            | 15 KB                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>SOFTWARE FEATURES</b>      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Quality of Service</b>     | <ul style="list-style-type: none"> <li>• Port-based/802.1p/DSCP QoS</li> <li>• 8 Priority Queues</li> <li>• Priority Schedule Mode</li> <li>- WRR (Weighted Round Robin)</li> <li>• Queue Weight Config</li> <li>• Bandwidth Control</li> <li>- Port-Based Rating Limit</li> <li>• Storm Control</li> <li>- Multiple Control Modes (kbps/pps)</li> <li>- Broadcast/Multicast/Unknown-Unicast Control</li> </ul>                                                                                                                      |
| <b>L2 Features</b>            | <ul style="list-style-type: none"> <li>• Link Aggregation</li> <li>- Static Link Aggregation</li> <li>- Up to 2 aggregation groups and up to 4 ports per group</li> <li>• Loopback Detection</li> <li>• Flow Control</li> <li>- 802.3x Flow Control</li> <li>• Mirroring</li> <li>- Port Mirroring</li> <li>- One-to-One</li> <li>- Many-to-One</li> <li>- Ingress/Egress/Both</li> <li>• Port Statistics</li> <li>- Port Mirror Status</li> <li>- Traffic Statistics</li> <li>• 802.1ab LLDP</li> <li>• IEEE 802.3az EEE</li> </ul> |
| <b>L2 Multicast</b>           | <ul style="list-style-type: none"> <li>• IGMP Snooping</li> <li>- IGMP v1/v2/v3 Snooping</li> <li>- Fast Leave</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>VLAN</b>                   | <ul style="list-style-type: none"> <li>• 802.1Q Tag VLAN</li> <li>- Max 32 VLAN Groups</li> <li>- 4K VID</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Transmission Method</b>    | Store-And-Forward                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>OTHERS</b>                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Certification</b>          | CE, FCC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |

|                        |                                                                                                                                                                                                                                                        |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Package Content</b> | <ul style="list-style-type: none"><li>• ES208G</li><li>• Power Adapter</li><li>• Mounting Feet</li><li>• Installation Guide</li></ul>                                                                                                                  |
| <b>Environment</b>     | <ul style="list-style-type: none"><li>• Operating Temperature: -5-45C (23-113F)</li><li>• Storage Temperature: -40-70C (-40-158F)</li><li>• Operating Humidity: 10-90% RH non-condensing</li><li>• Storage Humidity: 5-90% RH non-condensing</li></ul> |

[Download Datasheet](#)

\* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat

**URL :** <https://www.citraweb.com/produk/1613/>

**Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email [sales@citraweb.com](mailto:sales@citraweb.com)**