

Plus3E Series 600-800VA




- > Controlled by a technologically advanced microprocessor guaranteeing high reliability
- > Equipped with 2-steps boost & 1-step buck AVR to stabilize output voltage
- > USB port and monitor software is designed to manage UPS status via PC (Optional)
- > Coaxial cable line / modem / phone protection
- > Built-in DC start function enables UPS to be started without AC power supplied
- > Constant current, constant voltage battery charger (CCCV Battery Charger)
- > UPS will charge itself even though power switch is off (Off mode charging)
- > Over / under voltage protection (UPS will go to battery mode)
- > Lightning / surge protection 175 joules
- > UPS will shut down upon battery low ; UPS will restart automatically upon AC recovery (Auto-restart)
- > Smart USB charging station 5VDC 2.4A max. for smart devices power charging (Optional)

Specifications:

CAPACITY	600VA/360W	800VA/480W
INPUT		
Voltage	220/230Vac	
Voltage Range	-30% +25%	
Frequency	50Hz or 60Hz (Auto-Sensing)	
OUTPUT		
Voltage Regulation	AC mode / Battery normal : +/- 10%	
Frequency	AC mode: 47-53Hz for 50Hz or 57-63Hz for 60Hz ; Battery mode:50Hz or 60Hz +/- 1Hz	
Waveform	Simulated Sinewave	
Transfer Time	< 6ms(Typical)	
Outlet: Schuko	3pcs Back-up/AVR/Surge protected + 3pcs Surge only	
USB Charge (Optional)	2 ports, 5VDC 2.4A max.	
Coax-TV Protector (Optional)	2 ports	
BATTERY		
Type	Maintenance free sealed lead-acid battery	
Voltage	12VDC	
Capacity & Number	12V/7AH*1pc	12V/9AH*1pc
Recharge Time	5 hours to 90% after complete discharge	
Safety Protection	Over Charge & Over Discharge Protection	
Advanced Battery Management	Yes	
DISPLAY		
LED Status Indicators	AC normal (Blue), Battery backup(Yellow), UPS cut off / Fault(Red)	
AUDIBLE ALARM		
Battery Mode	Two short tones every 8 seconds	
Low Battery	Four short tones every second	
Overload	Beeping continuously	
Fault	Beeping continuously	
MANAGEMENT		
USB Communication Port (Optional)	Support with download monitoring software	
ENVIRONMENT		
Operating Temperature	0°C - 40°C (32°F - 104°F)	
Humidity	0-95% (Non-condensing)	
Acoustic Noise	<40 dB at 1M	
PHYSICAL		
Dimension (D*W*H)	320*175*95mm	

*Product specifications are subject to change without further notice.

Intelligent Battery Door Design:

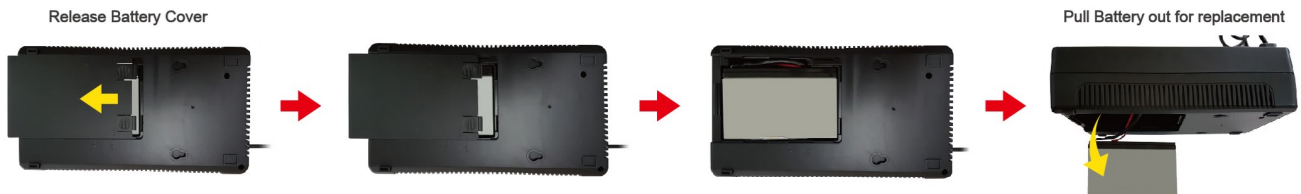

Model Name Table:

MODEL	Power Rating	Model Format	Indicators	USB port	USB Charge
Plus3E-600G	600VA/360W	Brick	LED	-	-
Plus3E-U600G	600VA/360W	Brick	LED	V	-
Plus3E-S600G	600VA/360W	Brick	LED	-	V
Plus3E-US600G	600VA/360W	Brick	LED	V	V
Plus3E-800G	800VA/480W	Brick	LED	-	-
Plus3E-U800G	800VA/480W	Brick	LED	V	-
Plus3E-S800G	800VA/480W	Brick	LED	-	V
Plus3E-US800G	800VA/480W	Brick	LED	V	V